




Dongguan JH Amorphous Co., Ltd.

Contact: Julia Yim Tel / WhatsApp: +86 13686646827

E-mail: julia@amorphousem.com website: www.amorphousem.com

Address: Room 301, Building 2, 58 Liusha South Road, Shijie, Dongguan, Guangdong,

Physical Specifications

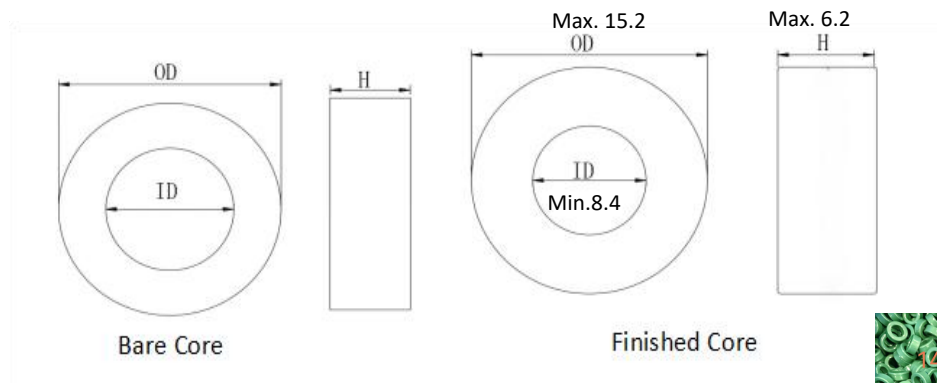

OD -Outer Diameter ID-Inner Diameter H-core height

Ae-Effective cross section area

Aw-window area

Weight-Weight in Grams

Finish Type: Coating Core

Finish Color: Green

JH P/N	Core Dimensions						Effective cross-section area (mm2)	Mean path length (mm)	Window area (mm2)	Weight (g)	Inductance / Turn AL(μH) ±30%	
	Bare Core Dim.(mm)			Finished Core Dim. (mm)							10KHz	100KHz
	OD	ID	H	OD	ID	H						
JHNT 14*9.5*5	14	9.5	5	15	9	6	8.78	36.90	70.85	2.39	21	

Material Properties

Core Material: Fe-based Nanocrystalline 1K107

Saturate induction / Bs (T)	1.25	Saturation Magnetostriction (λs)	2.0
Curie temperature Tc (°C)	560	Density ρ (g/cm ³)	7.2
Crystalline temp. Tx (°C)	510	Resistivity δ (μΩ.cm)	100
Hardness Hv	880	Ribbon Thickness (μm)	18
Initial permeability (μi)	80,000	Stacking factor	≥ 0.75
Working temperature Tc (°C)	-40~140		

Electrical Characteristics

Inductance	Turns	Test Condition	Test Equipment
Z=11 μH MIN	1Ts	10KHz/0.1V, 100Ω, 25±5°C	ZX8516B or Equivalent
Z=25 μH	1Ts	10KHz/0.1V, 100Ω, 25±5°C	ZX8516B or Equivalent
Z=24.3 μH	1Ts	10KHz/0.1V, 100Ω, 25±5°C	ZX8516B or Equivalent








Dongguan JH Amorphous Co., Ltd.

Contact: Julia Yim Tel / WhatsApp: +86 13686646827

E-mail: julia@amorphousoem.com website: www.amorphousoem.com

Address: Room 301, Building 2, 58 Liusha South Road, Shijie, Dongguan, Guangdong,

Permeability of Different Soft Magnet Material Cross reference

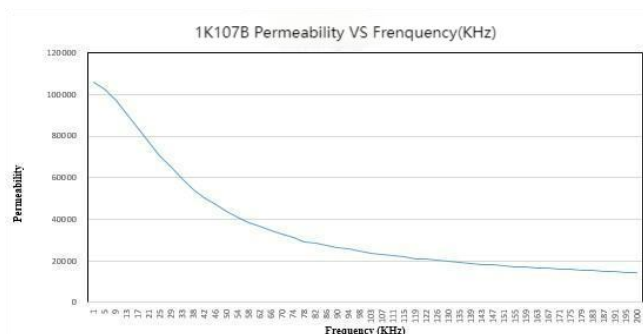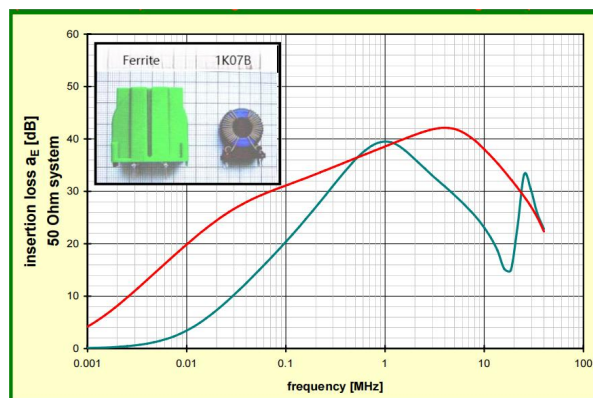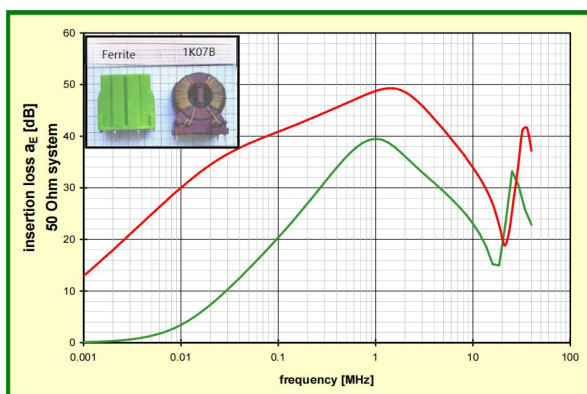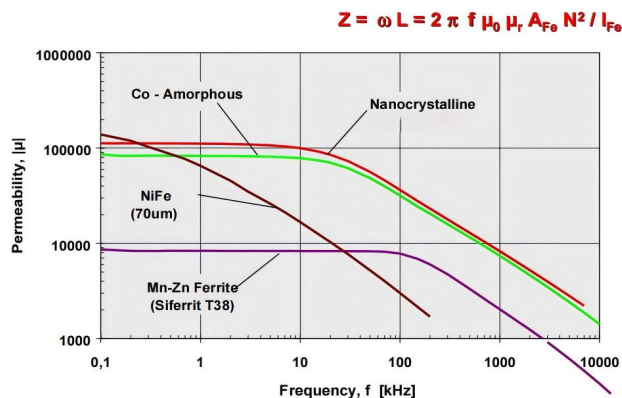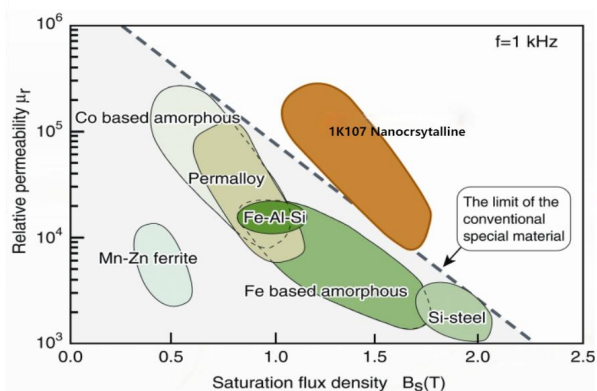

1K107B B-H Loop

